




Vibration sensor

VIBRATION IO-LINK SWITCH

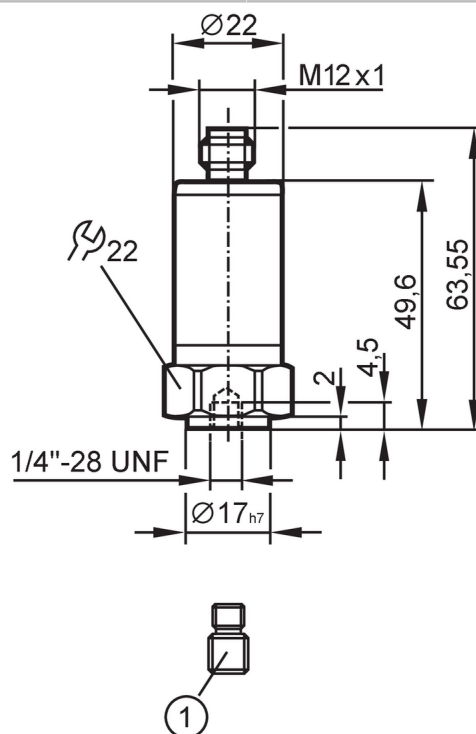

1 set screw 1/4"-28 UNF / M8



Product characteristics

Number of inputs and outputs

Number of digital outputs: 2

Application

Application

industrial machines

Electrical data

Operating voltage [V]

18...30 DC

Current consumption [mA]

< 50

Min. insulation resistance [MΩ]

100; (500 V DC)

Protection class

III

Reverse polarity protection

yes

Type of sensor

Microelectromechanical system (MEMS)

Inputs / outputs

Number of inputs and outputs

Number of digital outputs: 2

Outputs

Output signal

switching signal; IO-Link

Electrical design

PNP/NPN; (configurable)

Number of digital outputs

2

Output function

normally open / closed

Max. voltage drop switching output DC [V]

2

Max. current load per output [mA]

100

Short-circuit protection

yes



Vibration sensor

VIBRATION IO-LINK SWITCH

Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Measuring/setting range		
Note on setpoint SP	configurable	
Frequency range [Hz]	2...10000	
Measuring principle	capacitive	
Number of measurement axes	1	
v-RMS		
Measuring range of vibration [mm/s]	0...45	
Set point SP [mm/s]	0.2...45	
Reset point rP [mm/s]	0...44.8	
In steps of [mm/s]	0.2	
a-Peak / a-RMS		
Measuring range of vibration	0...50 g	0...490.3 m/s²
Set point SP	0.2...50 g	2...490.3 m/s²
Reset point rP	0...49.8 g	0...488.3 m/s²
In steps of	0.2 g	2 m/s²
Crest		
Measuring range of vibration	1...50	
Set point SP	2...50	
Reset point rP	1...49	
In steps of	1	
d-Peak2Peak		
Measuring range [mm]	0...32	
Set point SP [mm]	0.2...32	
Reset point rP [mm]	0..31.8	
In steps of [mm]	0.001	
Temperature measurement		
Measuring range [°C]	-30...80	
Resolution [°C]	0.1	
Set point SP [°C]	-28...80	
Reset point rP [°C]	-30...78	
In steps of [°C]	2	
Accuracy / deviations		
Accuracy	≤ 4 kHz +/-10 %; ≥ 4...10 kHz: < 3 dB	
Accuracy [K]	± 2,5 K + (0,2 x (Umgebungstemperatur - Oberflächentemperatur))	
Linearity deviation	2 %	
Software / programming		
Parameter setting options	Software	
Diagnostic functions	self-test	



Vibration sensor

VIBRATION IO-LINK SWITCH

Interfaces		
Communication interface	IO-Link	
Transmission type	COM3 (230,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9: 2013-07	
Profiles	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
	Function	Measurement data, standard resolution
Required master port class	A	
Process data analog	10	
Process data binary	2	
Min. process cycle time [ms]	3.6	
Supported DeviceIDs	Type of operation	DeviceID
	default	1569
Note	For further information please see the IODD PDF file at "Downloads"	
Operating conditions		
Ambient temperature [°C]	-30...80	
Storage temperature [°C]	-30...80	
Protection	IP 67; IP 68; IP 69K	
Tests / approvals		
EMC	2014/30/EU	
	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g 11 ms
		500 g 1 ms
Vibration resistance	DIN EN 60068-2-6	20 g / 10...3000 Hz
UL approval	Ta	-30...70 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current (Marking Class 2)
	UL approval number	L002
	File number UL	E251902
Mechanical data		
Weight [g]	107.6	
Type of mounting	set screw	
Material	housing: stainless steel (1.4404 / 316L)	
Tightening torque [Nm]	8	
Accessories		
Items supplied	set screw: 1 x (1/4" 28 UNF / M8 x 1,25 mm)	
Remarks		
Pack quantity	1 pcs.	

VVC005



Vibration sensor

VIBRATION IO-LINK SWITCH

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4; Maximum cable length: 20 m



1	L+
2	OUT2
3	L-
4	OUT1 switching output or IO-Link