




AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

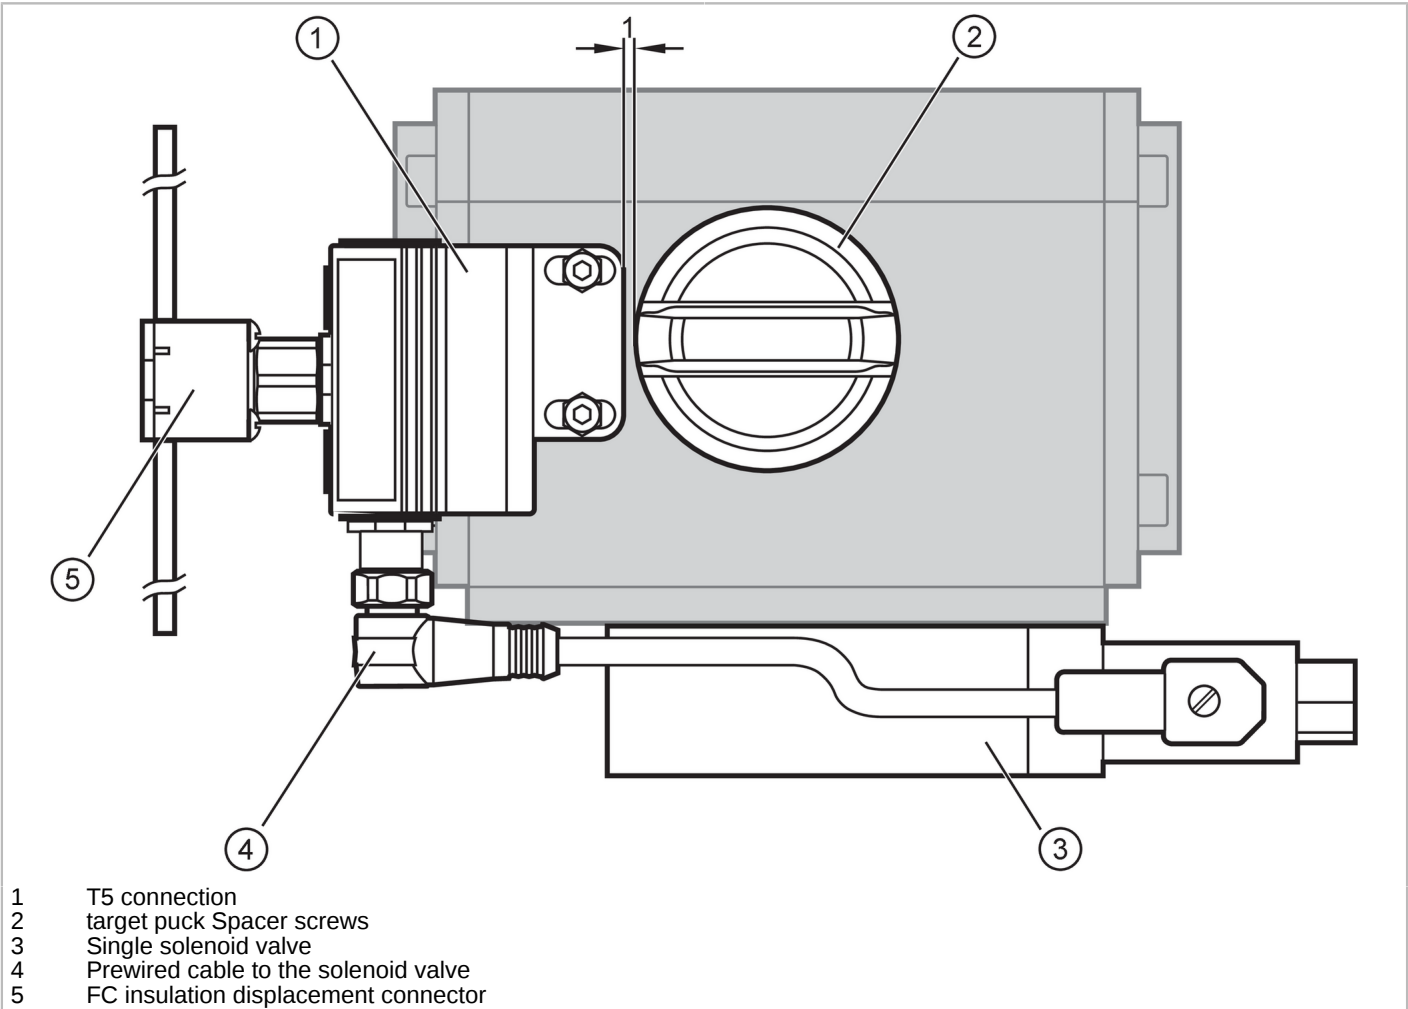

Product characteristics		
Output function		PNP
Application		
Application		direct open and close valve control
Components		T5 connection: 1, AC2316
		target puck: 1, E12724
		Spacer: 1, E12526
		Flat cable insulation displacement connector: 1, E75471
		screw: 1, E12752
		Single solenoid valve: 1, ZJF131
		Silencer: 2
		Connection cable: 1, EVC030
Electrical data		
Max. current consumption from AS-i	[mA]	160
Operating voltage AUX DC	[V]	26.5...31.6; (cULus - Class 2 source required)
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 2; Number of digital outputs: 1
Inputs		
Number of digital inputs		2




AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

Outputs		
Number of digital outputs		1
Output function		PNP
AS-i classification		
AS-i version		2.1
AS-i profile		S-7.A.E
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	A.E
Mechanical data		
Weight	[g]	784.5
Mounting		non-flush mountable
Hole spacing	[mm]	80
Shaft height of actuator stem	[mm]	20
Remarks		
Pack quantity		1 pcs.

Electrical connection - Socket

Connector: 1 x M12; coding: A; Contacts: 3




Outputs	
3	External voltage -
4	Switching output 1 +

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 4



Connection

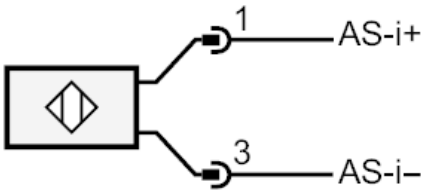

ZZ0668



AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

Connection	
1	AS-i +
3	AS-i -