




AS-Interface value-added automation set for pneumatic quarter-turn actuators


ADDED VALUE PACKAGE AS-i T5

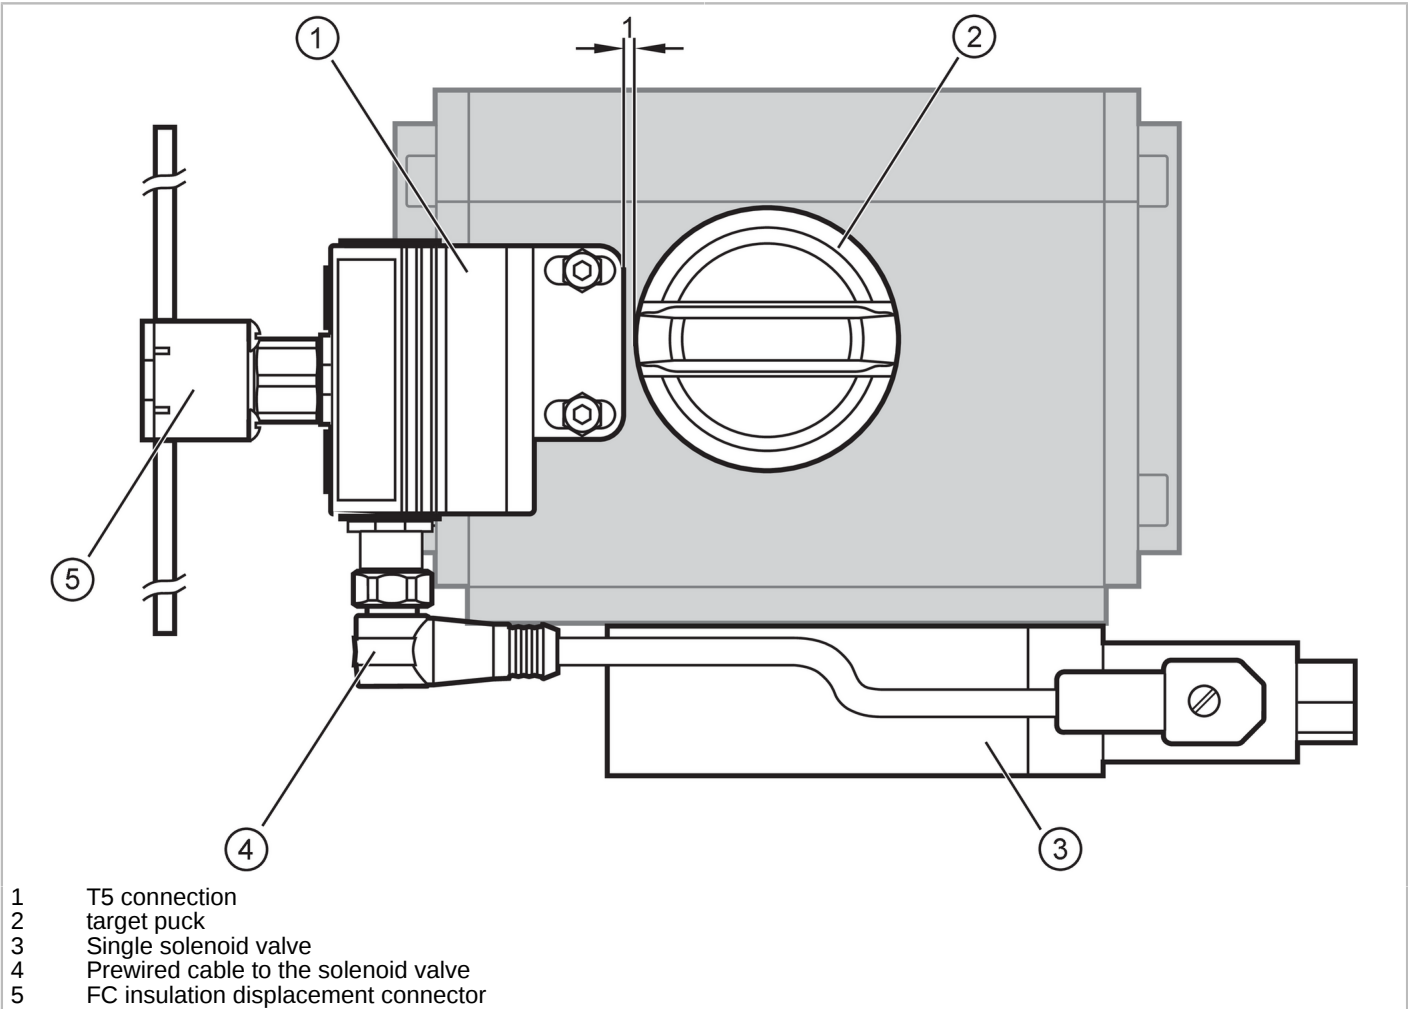

Product characteristics	
Output function	PNP
Application	
Application	direct open and close valve control
Components	T5 connection: 1, AC2316
	target puck: 1, E12724
	Flat cable insulation displacement connector: 1, E75471
	Single solenoid valve: 1, ZJF131
	Silencer: 2
Connection cable: 1, EVC030	
Electrical data	
Max. current consumption from AS-i	[mA] 160
Operating voltage AUX DC	[V] 26.5...31.6; (cULus - Class 2 source required)
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
Inputs	
Number of digital inputs	2
Outputs	
Number of digital outputs	1

**AS-Interface value-added automation set for pneumatic quarter-turn actuators**

ADDED VALUE PACKAGE AS-i T5

Output function	PNP
AS-i classification	
AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E
Mechanical data	
Weight [g]	763.1
Mounting	non-flush mountable
Hole spacing [mm]	80
Shaft height of actuator stem [mm]	30
Remarks	
Pack quantity	1 pcs.
Electrical connection - Socket	
Connector: 1 x M12; coding: A; Contacts: 3	
	
Outputs	
3	External voltage -
4	Switching output 1 +
Electrical connection - plug	
Connector: 1 x M12; coding: A; Contacts: 4	
	
Connection	
Connection	
1	AS-i +
3	AS-i -