




AS-Interface value-added automation set for pneumatic quarter-turn actuators

ADDED VALUE PACKAGE AS-i T5

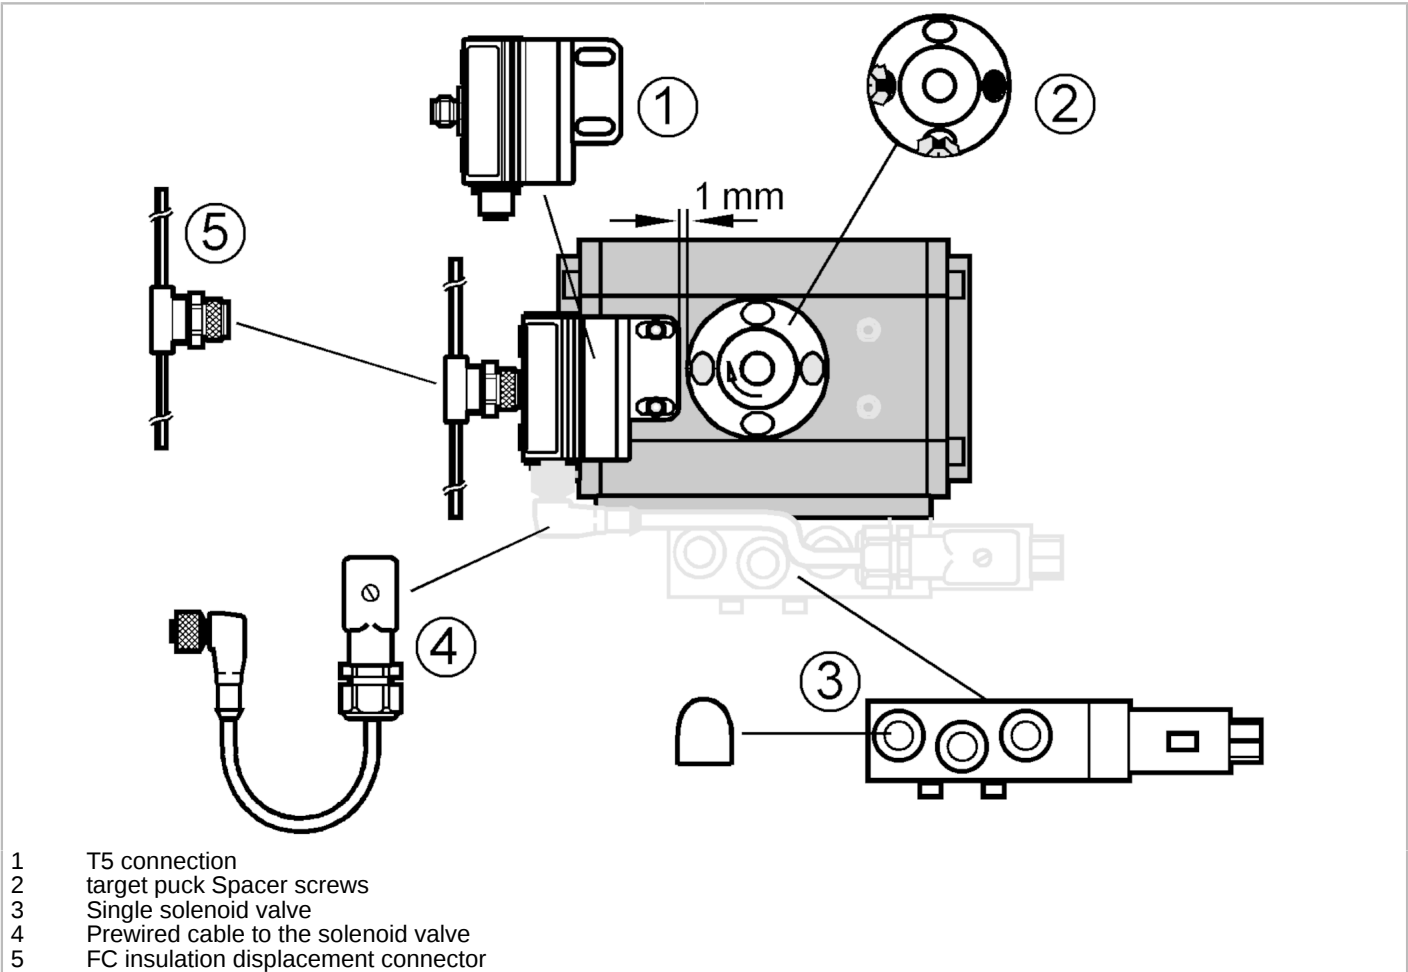

Product characteristics

Output function	PNP
-----------------	-----

Application

Application	direct open and close valve control
Components	T5 connection: 1, AC2316
	target puck: 1, E17328
	Flat cable insulation displacement connector: 1, E75471
	Single solenoid valve: 1, ZJF131
	Silencer: 2
	Connection cable: 1, EVC031

Electrical data

Max. current consumption from AS-i	[mA]	160
Operating voltage AUX DC	[V]	26.5...31.6; (cULus - Class 2 source required)

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
------------------------------	---

Inputs

Number of digital inputs	2
--------------------------	---

Outputs

Number of digital outputs	1
---------------------------	---



AS-Interface value-added automation set for pneumatic quarter-turn actuators

ADDED VALUE PACKAGE AS-i T5

Output function	PNP
AS-i classification	
AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E
Mechanical data	
Weight [g]	788.2
Mounting	non-flush mountable
Hole spacing [mm]	130
Shaft height of actuator stem [mm]	30
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Electrical connection - Socket	
Connector: 1 x M12; coding: A; Contacts: 2	
Outputs	
3	External voltage -
4	Switching output 1 +
Electrical connection - plug	
Connector: 1 x M12; coding: A; Contacts: 4	
Connection	
Connection	
1	AS-i +
3	AS-i -