


DD111S



Evaluation unit for safe speed monitoring

Safety speed monitor wind

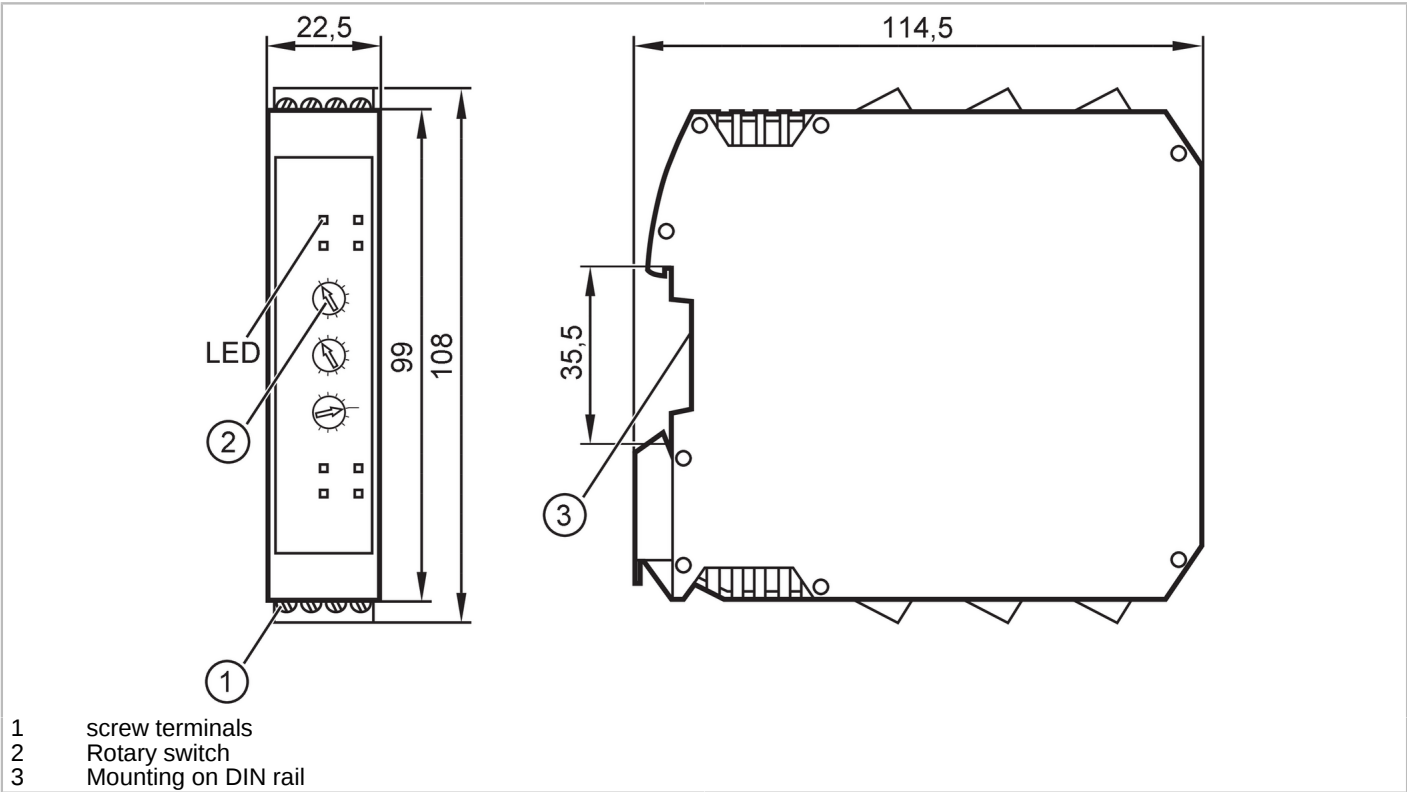

- 1 screw terminals
- 2 Rotary switch
- 3 Mounting on DIN rail



Product characteristics		
Housing		rectangular
Dimensions	[mm]	108 x 22.5 x 114.5
Safety-related switching outputs		
Electrical design		Relay; (Contacts potential-free)
Digital output		
Electrical design		PNP
Output function		1 x error output "Fault"; 1 x Diagnostic output "Overspeed"
Application		
Design		housing for DIN rail mounting
Application		reliable evaluation of rotating and linear movements with regard to overspeed
Electrical data		
Operating voltage	[V]	19.2...28.8 DC; (incl. 5 % residual ripple)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 125
Protection class		II
Max. power-on delay time	[ms]	3000
Auxiliary energy for sensors DC	[V]	24; (≤ 70 mA , voltage drop relative to the operating voltage ≤ 2 V)
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of relay outputs: 2



Evaluation unit for safe speed monitoring

Safety speed monitor wind

Inputs		
Input characteristics	S34, S43: "1": 6 mA / 24 V DC	
Input circuit of digital inputs	PNP	
Feedback circuit		
Current through feedback contacts	[mA]	< 100
Outputs		
Number of digital outputs	2	
Number of relay outputs	2	
Feedback circuit		
Short-circuit proof	yes	
Safety-related switching outputs		
Electrical design	Relay; (Contacts potential-free)	
Contact rating	6 A, 250 V AC / 24 V DC; (≥ 6 mA ; resistive load)	
Type of short-circuit protection	The contacts are to be protected by means of external fuses with a nominal current of < 3.6 A	
Digital output		
Electrical design	PNP	
Output function	1 x error output "Fault"; 1 x Diagnostic output "Overspeed"	
Max. current load per output	[mA]	20; (24 V DC, voltage drop relative to the supply voltage ≤ 2 V, non-safe)
Short-circuit proof	yes	
Measuring/setting range		
Setting range Hz	[Hz]	0.1...99.9
Frequency range	[Hz]	< 2000; (pulse duration: 100 μs: > 500 Hz ; 150 μs: ≤ 500 Hz)
Accuracy / deviations		
Hysteresis	[%]	5
Notes on the accuracy / deviation	Permitted frequency difference between the inputs: ≤ 10 % (f > 100 Hz) / ≤ 20 % (f < 100 Hz)	
Reaction times		
Response time to safety request	[ms]	f sel ≥ 100 Hz: t = 10,7 + 400 x (f sel ÷ f in)
		f sel < 100 Hz: t = 14 + (4500 ÷ f in)
Risk time (response time for safety-related faults)	[ms]	5.5
Legend	t :	Response time
	f sel :	set frequency (preset value)
	f in :	applied frequency (actual value)
Operating conditions		
Ambient temperature	[°C]	-40...55
Note on ambient temperature	observe the free space for convection (see operating instructions)	
Storage temperature	[°C]	-40...70
Max. relative air humidity	[%]	95
Max. height above sea level	[m]	2000
Protection	IP 20	



Evaluation unit for safe speed monitoring

Safety speed monitor wind

Safety classification		
Complies with the requirements	ISO 13849-1 Category 4, PL e	
	IEC 61508 SIL 3	
Mission time TM [h]	≤175200	
Mission time TM (additional indication)	20 years	
PFH [1/h]	DC13 (2 A), 24 V DC	7,69E-09
	AC15 (1 A), 230 V AC	8,25E-09
	AC15 (3 A), 230 V AC	9,15E-09
Hardware Failure Tolerance HFT	1; (Type B)	
Mechanical data		
Weight [g]	306.5	
Housing	rectangular	
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))	
Dimensions [mm]	108 x 22.5 x 114.5	
Material	housing: PA	
Displays / operating elements		
Display	Voltage	1x LED, green
	release	1x LED, yellow
	Configuration	1x LED, blue
	error	1x LED, red
	Switching status	2x LED, green
	input signal	2x LED, yellow
Remarks		
Remarks	safety classification considering 1000 relay operations/year	
Pack quantity	1 pcs.	
Electrical connection		
screw terminals: 0.5...2.5 mm²; AWG 30...12		
A1		
1 (L+)	L+	
2 (S33)	L+	(US; Sensor supply)
3 (S35)	L-	(US; Sensor supply)
4 (S34)	IN	FI
A2		
1 (L-)	L-	
2 (S44)	L+	(US; Sensor supply)
3 (S45)	L-	(US; Sensor supply)
4 (S43)	IN	FI
A3		
1 (13)	OUT1	DO1 (NO) (Relay)
2 (n.c.)	n.c.	
3 (n.c.)	n.c.	
4 (14)	OUT2	DO2 (NO) (Relay)

DD111S



Evaluation unit for safe speed monitoring

Safety speed monitor wind

C1		
1 (Y3)	IN1	DI1 (PNP)
2 (Y4)	IN2	DI2 (NPN)
3 (Y5)	IN3	DI3
4 (Y6)	IN4	DI4
C2		
1 (Y7)	OUT1	DO1
2 (Y8)	OUT2	DO2
3 (Y1)	OUT3	DO3
4 (Y2)	IN	DI
C3		
1 (23)	OUT1	DO1 (NO) (Relay)
2 (n.c.)	n.c.	
3 (n.c.)	n.c.	
4 (24)	OUT2	DO2 (NO) (Relay)
DI: digital input; DO: digital output; FI: frequency input		