


DV2930



20-LED light tower

LED-Tower-20-a/IO-Link/Buzzer

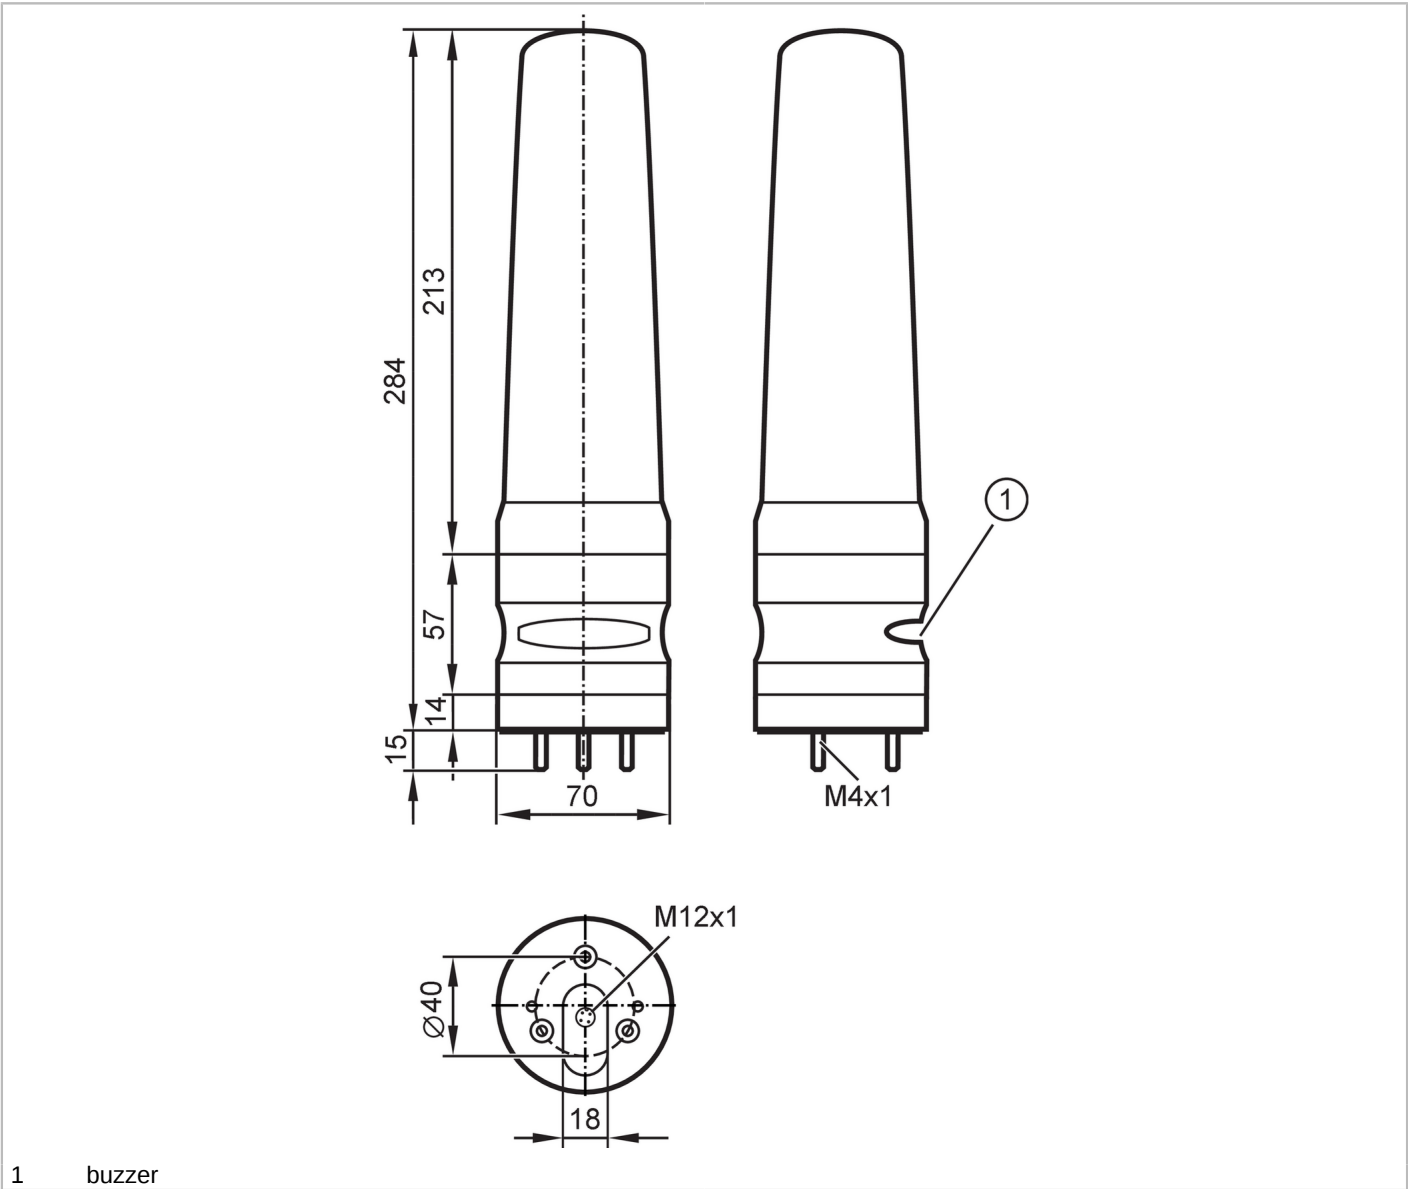

1 buzzer



Application	
Application	signaling machine conditions
Electrical data	
Operating voltage	[V] 18...30 DC; (to SELV/PELV ; "supply class 2" to cURus)
Nominal voltage DC	[V] 24
Current consumption	[mA] < 200
Switch-on peak current	[mA] 500; (2 ms; 400 mA: 50 ms)
Inputs	
Input current High	[mA] 6
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)

DV2930



20-LED light tower

LED-Tower-20-a/IO-Link/Buzzer

IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Common - I&D	Identification and Diagnosis
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	2.7	
Supported DeviceIDs	Type of operation	DeviceID
	default	1533

Operating conditions		
Ambient temperature [°C]		-25...50
Storage temperature [°C]		-40...75
Max. relative air humidity [%]		90
Air pressure [kPa]		< 106
Max. height above sea level [m]		2000
Protection		IP 54

Tests / approvals		
MTTF [years]		197

Mechanical data		
Weight [g]		493
Dimensions [mm]		Ø 70 / L = 284
Material		housing: ABS; lens: PC

Displays / operating elements		
Display	LED segment	20 x LEDs, multi-color
Acoustic signal		buzzer
Max. sound pressure [dB]		85

Accessories		
Accessories (optional)		mounting base, E89060
		wall bracket, E89061
		Mounting adapter, E89063
		bracket with lateral cable entry, E89064
		mounting tube, E89065
		mounting tube, E89066
		mounting tube, E89067

Remarks		
Remarks		Further information is available in the manual.
Pack quantity		1 pcs.

Electrical connection - plug

Connector: M12; coding: A; Contacts: 4



1	UB+
2	not used
3	UB-
4	IO-Link (C/Q)

DV2930


20-LED light tower

LED-Tower-20-a/IOL/Buzzer



Diagrams and graphs

Installation

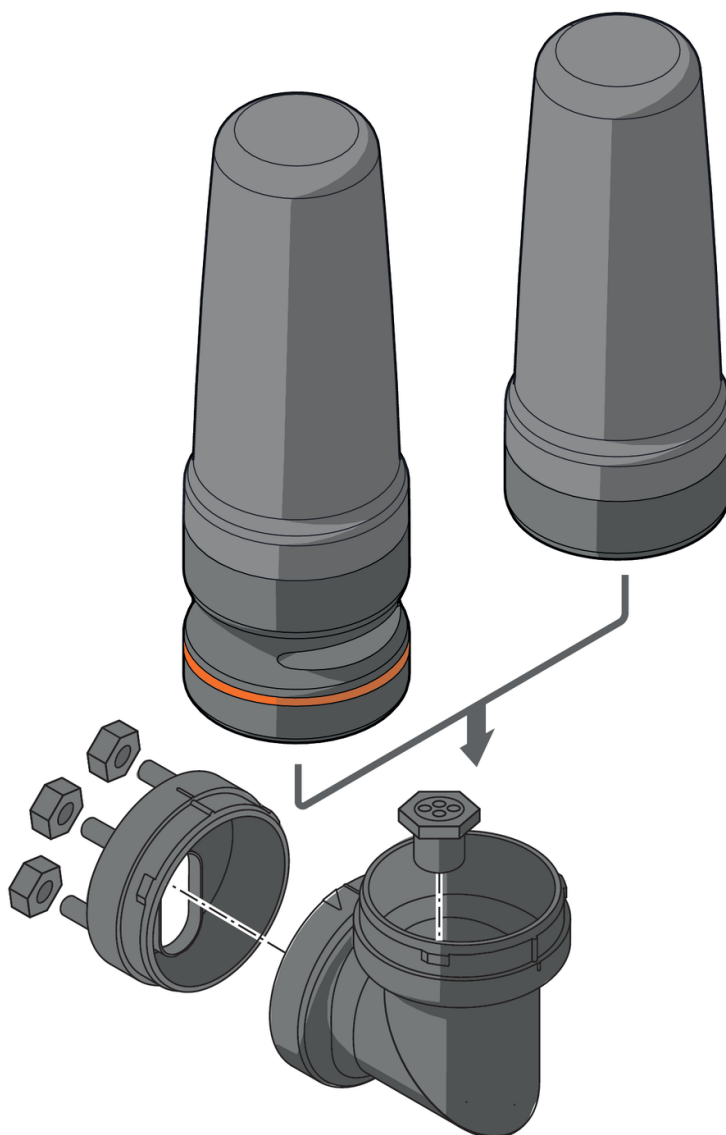


DV2930

20-LED light tower

LED-Tower-20-a/IOL/Buzzer



Installation

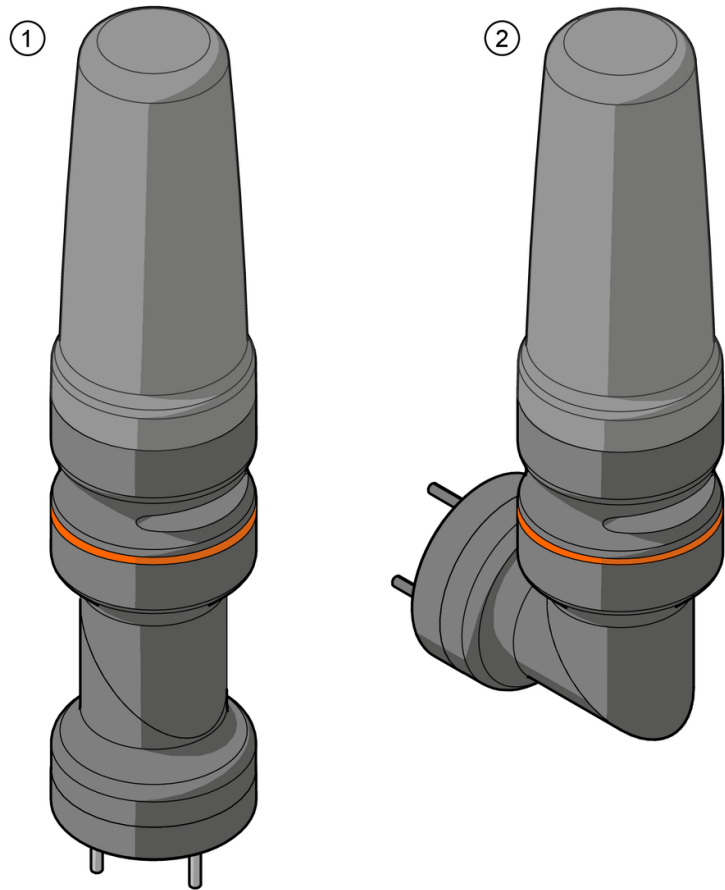

- 1 mounting on a horizontal surface
- 2 mounting on a vertical surface


DV2930

20-LED light tower

LED-Tower-20-a/IOL/Buzzer



base mounting

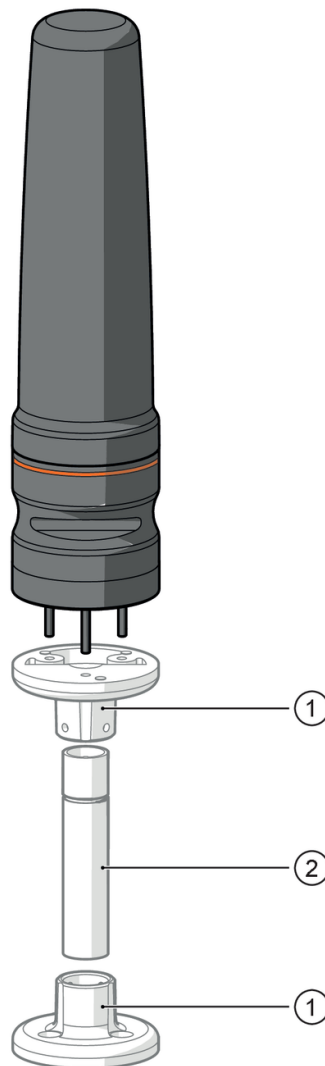

- 1 E89060 not supplied
- 2 E89065, E89066, E89067 not supplied


DV2930

20-LED light tower

LED-Tower-20-a/IOL/Buzzer



wall mounting

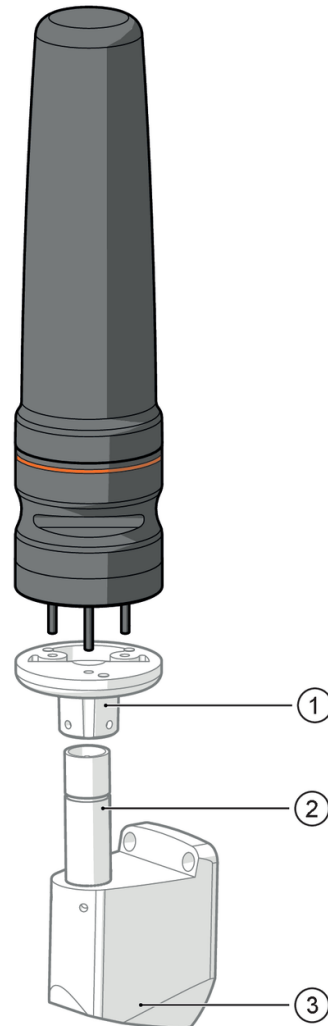

- 1 E89060 not supplied
- 2 E89065, E89066, E89067 not supplied
- 3 E89061 not supplied