


E11974



Connection cable

cable Plus and Minus crossed

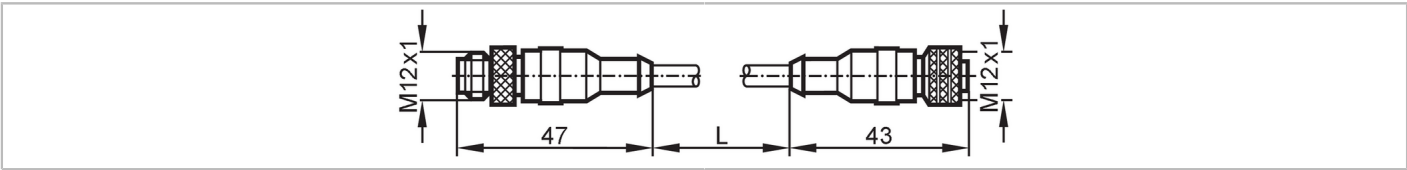

Application	
Special feature	Free from silicone; Halogen-free; gold-plated contacts
Design	for sensors programmable via wiring to change the polarity of the supply voltage on pin 1 and pin 3
Application	Industrial applications
Free from silicone	yes
Electrical data	
Operating voltage [V]	< 250 AC / < 300 DC
Max. current load total [A]	3
Operating conditions	
Ambient temperature [°C]	-25...85
Protection	IP 68
Mechanical data	
Weight [g]	39.7
Molded-body material	PUR
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 4, gold-plated; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm



Electrical connection
Cable: 0.3 m, PUR, Halogen-free, black, Ø 4.7 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Connection

E11974



Connection cable

cable Plus and Minus crossed

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Contacts: 4, gold-plated; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm

