


E12295



Female cordset

ADOAH080VAS0005E08

For 8-wire cordsets the core colors are not standardized.
Please note the wiring of the sensor and the cordsets (see data sheet).

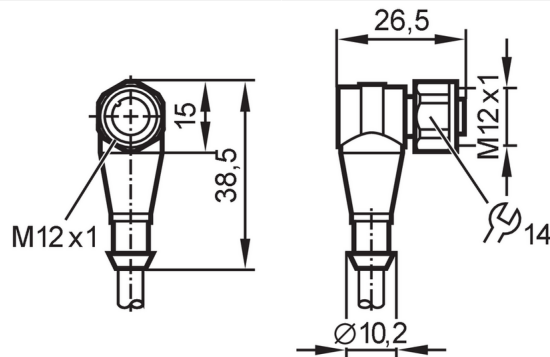

Application		
Special feature		Free from silicone; gold-plated contacts
Application		sanitary and wet areas in the food industry
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	2
Operating conditions		
Ambient temperature	[°C]	-25...100
Protection		IP 68; IP 69K
Mechanical data		
Weight	[g]	325.2
Dimensions	[mm]	26.5 x 15 x 38.5
Molded-body material		PVC
Material nut		stainless steel (1.4404 / 316L)
Sealing material		EPDM
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 5 m, PVC, orange, Ø 6.6 mm; 8 x 0.25 mm ² (32 x Ø 0.1 mm)		
Electrical connection - Socket		
Connector: 1 x M12, angled; coding: A; Contacts: 8, gold-plated; Moulded body: PVC, orange; Locking: stainless steel (1.4404 / 316L); sealing: EPDM; Tightening torque: 0.7...0.9 Nm		


E12295



Female cordset

ADOAH080VAS0005E08

Connection

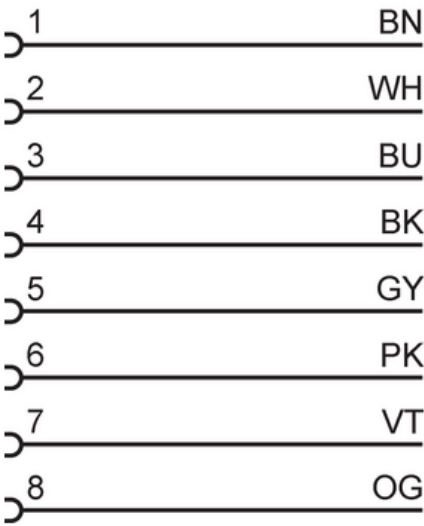

Colors to DIN EN 60947-5-2

Core colors :

- | | |
|------|--------|
| BK = | black |
| BN = | brown |
| BU = | blue |
| GY = | grey |
| PK = | pink |
| OG = | orange |
| VT = | lilac |
| WH = | white |