


E12774



Female wirable connectors

SDOGB050ZDSFKPG

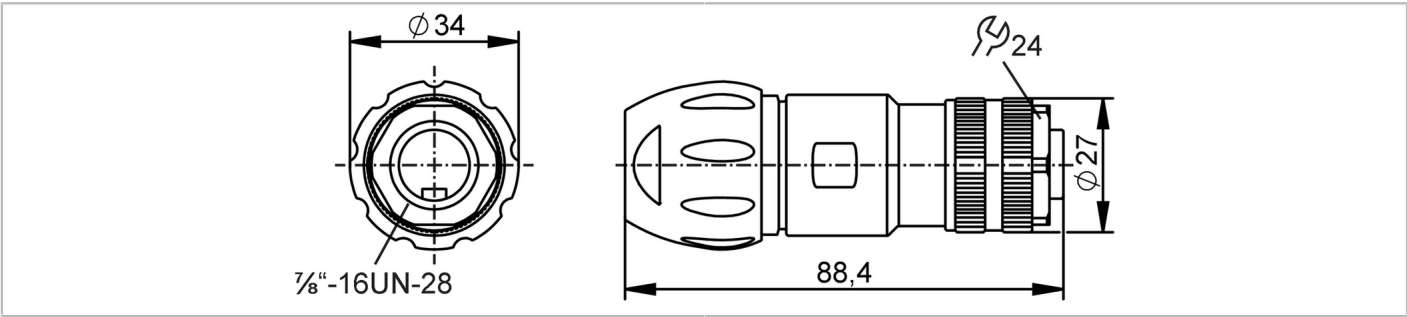

Application		
Special feature		Free from silicone; gold-plated contacts
Application		Industrial applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 400 AC/DC
Protection class		II
Max. current load total	[A]	9
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 67
Mechanical data		
Weight	[g]	48.808
Molded-body material		PA; PUR
Material nut		diecast zinc, nickel-plated
Sealing material		NBR
Remarks		
Pack quantity		1 pcs.
Electrical connection		
screw terminals: ...1.5 mm²; Cable sheath: Ø 7...13 mm; AWG 16		
Electrical connection - Socket		
Connector: 1 x 7/8", straight; Contacts: gold-plated; Moulded body: PA; PUR; Locking: diecast zinc, nickel-plated; sealing: NBR		

Connection	