




Process adapters aseptic flange DIN11864-2A

ADAPT DIN11864-2A DN40

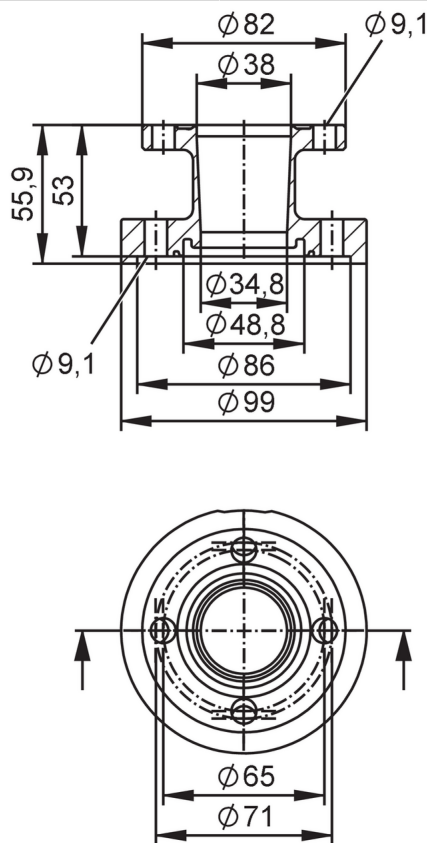

EC 1935/2004

FCM



Hygienic
Cleanable

Application

Design	for flow meter SMF	
Application	food and beverage industry; hygienic systems	
Pressure rating	25 bar	2.5 MPa

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

Mechanical data

Weight	[g]	2939.3
Housing		tubular
Dimensions	[mm]	Ø 99 / L = 55.9
Material		stainless steel (1.4404 / 316L)
Nominal diameter		DN40 (1 1/2")
Sensor connection		ifm-specific device flange
Process connection		aseptic flange DIN 11864-2A
Process connection suitable for pipe standard		(DIN EN 10357 series A); (DIN 11866 series A); (DIN 11850 series 1); (DIN 11850 series 2)
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.4 µm

E40522



Process adapters aseptic flange DIN11864-2A

ADAPT DIN11864-2A DN40

Accessories	
Items supplied	screws 8
Remarks	
Pack quantity	2 pcs.