


O2D542



Object recognition sensor

O2DCRDKG/E1/E4/EF/GM/W/30/5A

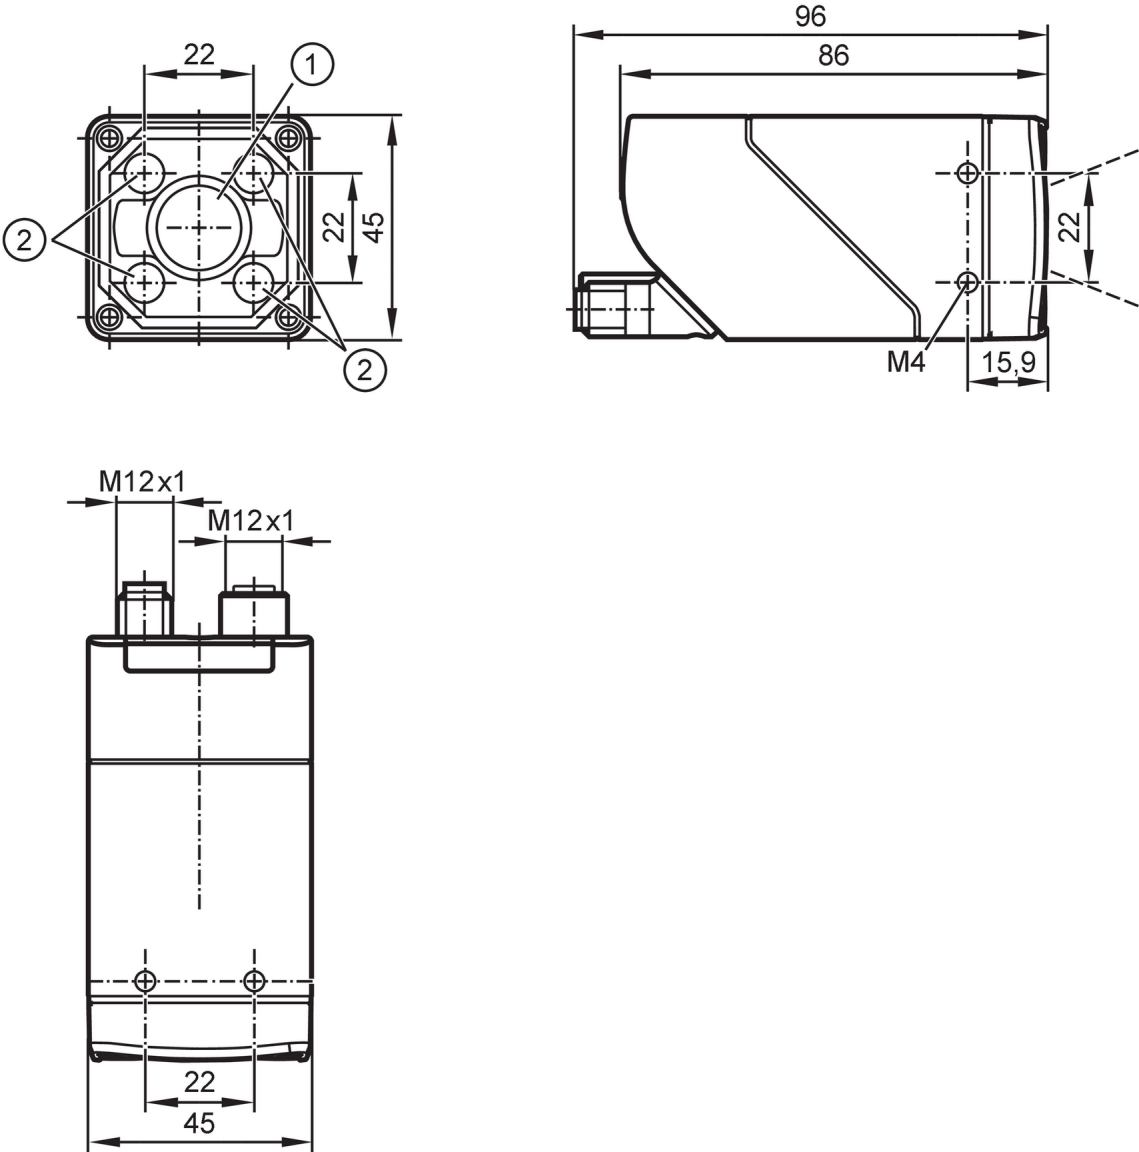

- 1 lens
- 2 Illumination unit



Product characteristics

Type of light	RGBW	
Image resolution	[px]	1280 x 960
Max. reading rate	[Hz]	40

Application

Special feature	polarization filter
-----------------	---------------------

Electrical data

Operating voltage	[V]	18...30 DC
Current consumption	[mA]	< 320; (24V DC typical)
Max. current consumption	[mA]	800; (18V DC, with switched outputs, memory stick active)
Protection class		III
Reverse polarity protection		yes



Object recognition sensor

O2DCRDKG/E1/E4/EF/GM/W/30/5A

Overvoltage category	II				
Type of light	RGBW				
Wave length [nm]	625; 525; 453				
Image sensor	CMOS image sensor black/white				
Inputs / outputs					
Number of inputs and outputs	Number of digital outputs: 2				
Inputs					
Trigger	external; 24 V PNP/NPN (IEC 61131-2 Typ 3); TCP/IP; PROFINET; internal				
Outputs					
Electrical design	PNP/NPN; (configurable)				
Number of digital outputs	2; (configurable)				
Output function	configurable				
Max. voltage drop switching output DC [V]	1				
Max. current load per output [mA]	100				
Short-circuit protection	yes				
Type of short-circuit protection	yes (non-latching)				
Overload protection	yes				
Monitoring range					
Field of view size [mm]	Operating distance	Field of view			
	35	25 x 19			
	300	184 x 138			
	500	304 x 228			
	1000	604 x 453			
	1500	904 x 678			
	2000	1204 x 903			
	2500	1504 x 1128			
Operating distance [mm]	> 35				
Image resolution [px]	1280 x 960				
Lens type	Wide angle				
Bewegungsgeschwindigkeit [m/s]	7				
Polarization filter available	yes				
Max. reading rate [Hz]	40				
Software / programming					
Parameter setting options	via PC with ifm Vision Assistant				
Interfaces					
Communication interface	Ethernet				
Ethernet					
Number of Ethernet interfaces	1				
Transmission standard	10Base-T; 100Base-TX				
Transmission rate	10 MBit/s; 100 MBit/s				
Protocol	TCP/IP; PROFINET				

O2D542



Object recognition sensor

O2DCRDKG/E1/E4/EF/GM/WI/30/5A

Factory settings	IP address: 192.168.0.69
	subnet mask: 255.255.255.0 (Class C)
	gateway IP address: 192.168.0.201
	MAC address: see type label
Usage type	Parameter setting; Data transmission

Operating conditions

Ambient temperature	[°C]	-10...50
Storage temperature	[°C]	-40...70
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	4000
Protection		IP 65
Pollution degree		3

Tests / approvals

EMC	EN IEC 61000-6-4 radiation of interference	industrial environments
	EN IEC 61000-6-2 noise immunity	industrial environments
Shock resistance	EN 60068-2-27	50 g 11 ms / not repetitive
	EN 60068-2-27	40 g 6 ms / repetitive
Vibration resistance	EN 60068-2-6	2 g (10 ... 150 Hz)
Photobiological safety		risk group 1; (EN 62471)
Electrical safety	EN IEC 61010-2-201	electrical supply only via PELV circuits
MTTF	[years]	59
UL approval	Ta	-10...50 °C
	Enclosure type	1
	voltage supply	Limited Energy
	File number UL	E364788

Mechanical data

Weight	[g]	616.2
Type of mounting		screw mounting; (bore hole M4 x 7mm)
Dimensions	[mm]	45 x 45 x 86
Material		housing: diecast zinc powder-coated; front lens: gorilla glass; LED window: PC; pushbuttons: POM
Sealing material		FKM
Tightening torque	[Nm]	2.1

Displays / operating elements

Display	Function	2 x LED, green
	Function	2 x LED, yellow
	Multi-function button	2 x LED, green/yellow
Operating elements	1	Multi-function button

Accessories

Accessories (optional)	Mounting accessories
	Protective panes

Remarks

Pack quantity	1 pcs.
---------------	--------

O2D542



Object recognition sensor

O2DCRDKG/E1/E4/EF/GM/W/30/5A

Electrical connection - Ethernet


Connector: 1 x M12; coding: D; Contacts: 4; Moulded body: stainless steel; sealing: FKM



1	TxD+
2	RxD+
3	TxD-
4	RxD-

Electrical connection - supply

Connector: 1 x M12; coding: A; Contacts: 5; Moulded body: stainless steel



1	U+
2	trigger input
3	0 V
4	Switching output 1 configurable
5	Switching output 2 configurable / trigger output with external illumination