




Retro-reflective sensor

OAR-FCKG

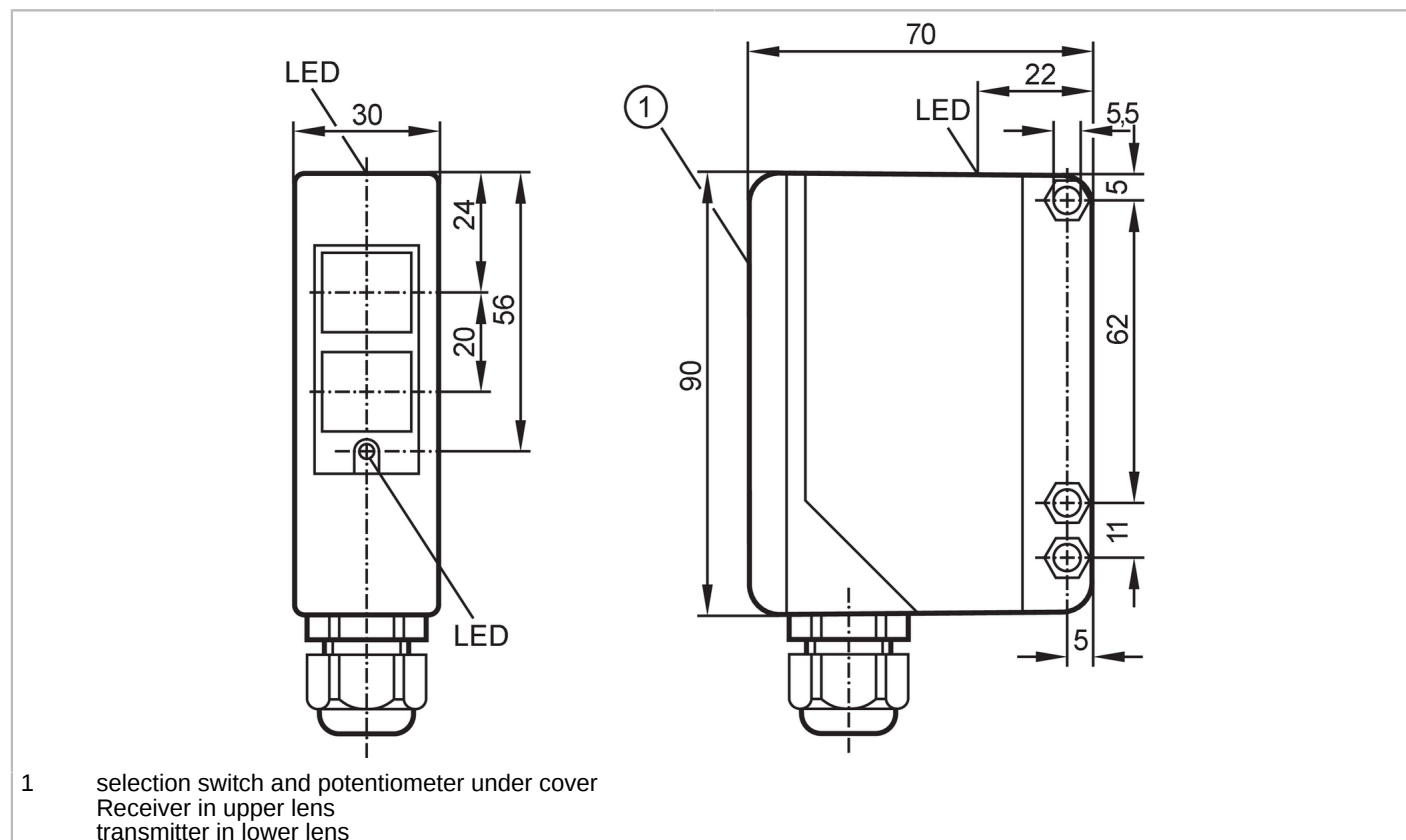

Product characteristics

Type of light	Infrared light
Housing	rectangular

Application

Special feature	Function check output
Function principle	Retro-reflective sensor
Application	Industrial applications

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 50
Protection class	II
Reverse polarity protection	yes
Type of light	Infrared light
Wave length [nm]	880

Outputs

Electrical design	PNP/NPN
Output function	light-on/dark-on mode; (programmable)
Function check output	yes
Max. current load for function check output [mA]	10
Permanent current rating of switching output DC [mA]	250



Retro-reflective sensor

OAR-FCKG

Max. current load in dual output mode	[mA]	100
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Range referred to prismatic reflector	[m]	0.25...10; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	350
Light spot dimensions refer to		at maximum range

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 65

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	402
UL approval	Ta	< 40 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	E029
	File number UL	E174191

Mechanical data

Weight	[g]	284.5
Housing		rectangular
Dimensions	[mm]	90 x 30 x 70
Material		housing: PPO modified
Lens material		front lens:PMMA
Lens alignment		Side sensing

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red

Accessories

Items supplied	Angle bracket: 1, E20514
	screwdrivers

Remarks

Pack quantity	1 pcs.
---------------	--------

OA5104




Retro-reflective sensor

OAR-FCKG

Electrical connection

terminals: ...1.5 mm²; Cable sheath: Ø 4.5...10 mm; Cable gland: M16 X 1.5

Connection

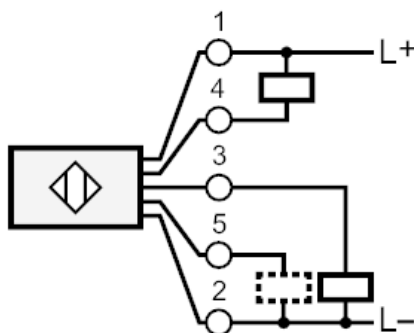

5 Function check output

Diagrams and graphs

excess gain graph

