


SI6800



Flow monitor

SIR11ABBFPKG/US-100-IPF

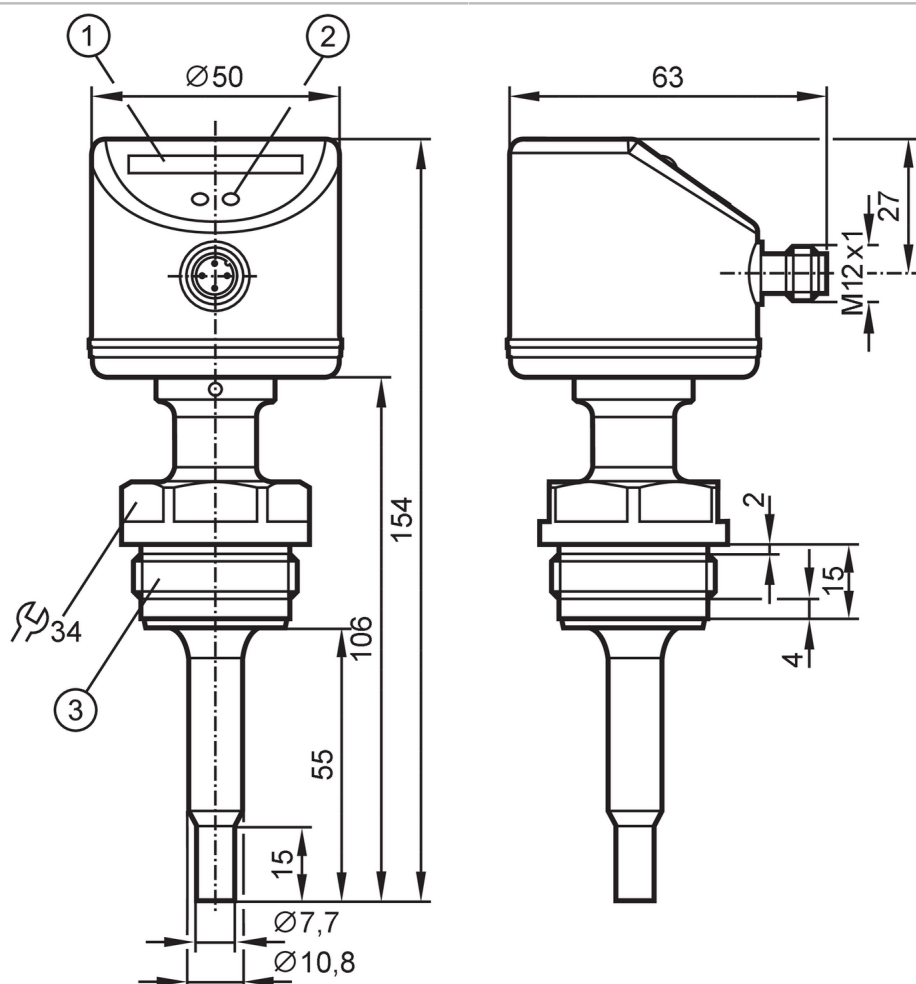

- 1 LED display
2 setting pushbutton
3 thread G1 Aseptoflex Vario



CR



EC

935

2004

EHI

DG ©

ertifi

d **F**

CM



L

K

Product characteristics

Number of inputs and outputs	Number of digital outputs: 1
Process connection	threaded connection G 1 external thread Aseptoflex Vario

Application

Special feature	gold-plated contacts	
Application	hygienic systems	
Medium temperature [°C]	-25...95; (for SIP process: ...140 °C)	
Pressure rating	30 bar	3 MPa
MAWP (for applications according to CRN) [bar]	30	

Electrical data

Operating voltage	[V]	19...36 DC
Current consumption	[mA]	< 60
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	10



Flow monitor

SIR11ABBFPKG/US-100-IPF

Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 1
Outputs		
Total number of outputs		1
Output signal		switching signal
Electrical design		PNP
Number of digital outputs		1
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Measuring/setting range		
Probe length L	[mm]	55
Liquids		
Setting range	[cm/s]	3...300
Greatest sensitivity	[cm/s]	3...100
Gases		
Setting range	[cm/s]	200...3000
Greatest sensitivity	[cm/s]	200...800
Accuracy / deviations		
Repeatability	[cm/s]	1...5
Note on repeatability		for water 5...100 cm/s; 25 °C
		Factory setting
Temperature drift	[cm/s x 1/K]	0.1; (for water 5...100 cm/s; 10...70 °C)
Max. temperature gradient of medium		300
Switch point accuracy	[cm/s]	± 2...± 10; (for water 5...100 cm/s; 25 °C; Factory setting)
Hysteresis	[cm/s]	2...5; (for water 5...100 cm/s; 25 °C; Factory setting)
Reaction times		
Response time	[s]	1...10
Software / programming		
Adjustment of the switch point		pushbuttons
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 67; IP 69K
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)

SI6800



Flow monitor

SIR11ABBFPKG/US-100-IPF

Vibration resistance	DIN EN 60068-2-6	10 g (55...2000 Hz)
MTTF [years]		298

Mechanical data		
Weight [g]		440
Housing		tubular
Dimensions [mm]		Ø 50 / L = 154
Material		stainless steel (1.4404 / 316L); PC; PBT-GF20; EPDM/X; sealing: FKM
Materials (wetted parts)		stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Process connection		threaded connection G 1 external thread Aseptoflex Vario
Probe diameter [mm]		7.7
Installation length EL [mm]		55

Displays / operating elements		
Display	Function	10 x LED, three-color

Remarks		
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

