


SM2400



Magnetic-inductive flow meter

SMK21XGXFRKG/US-100

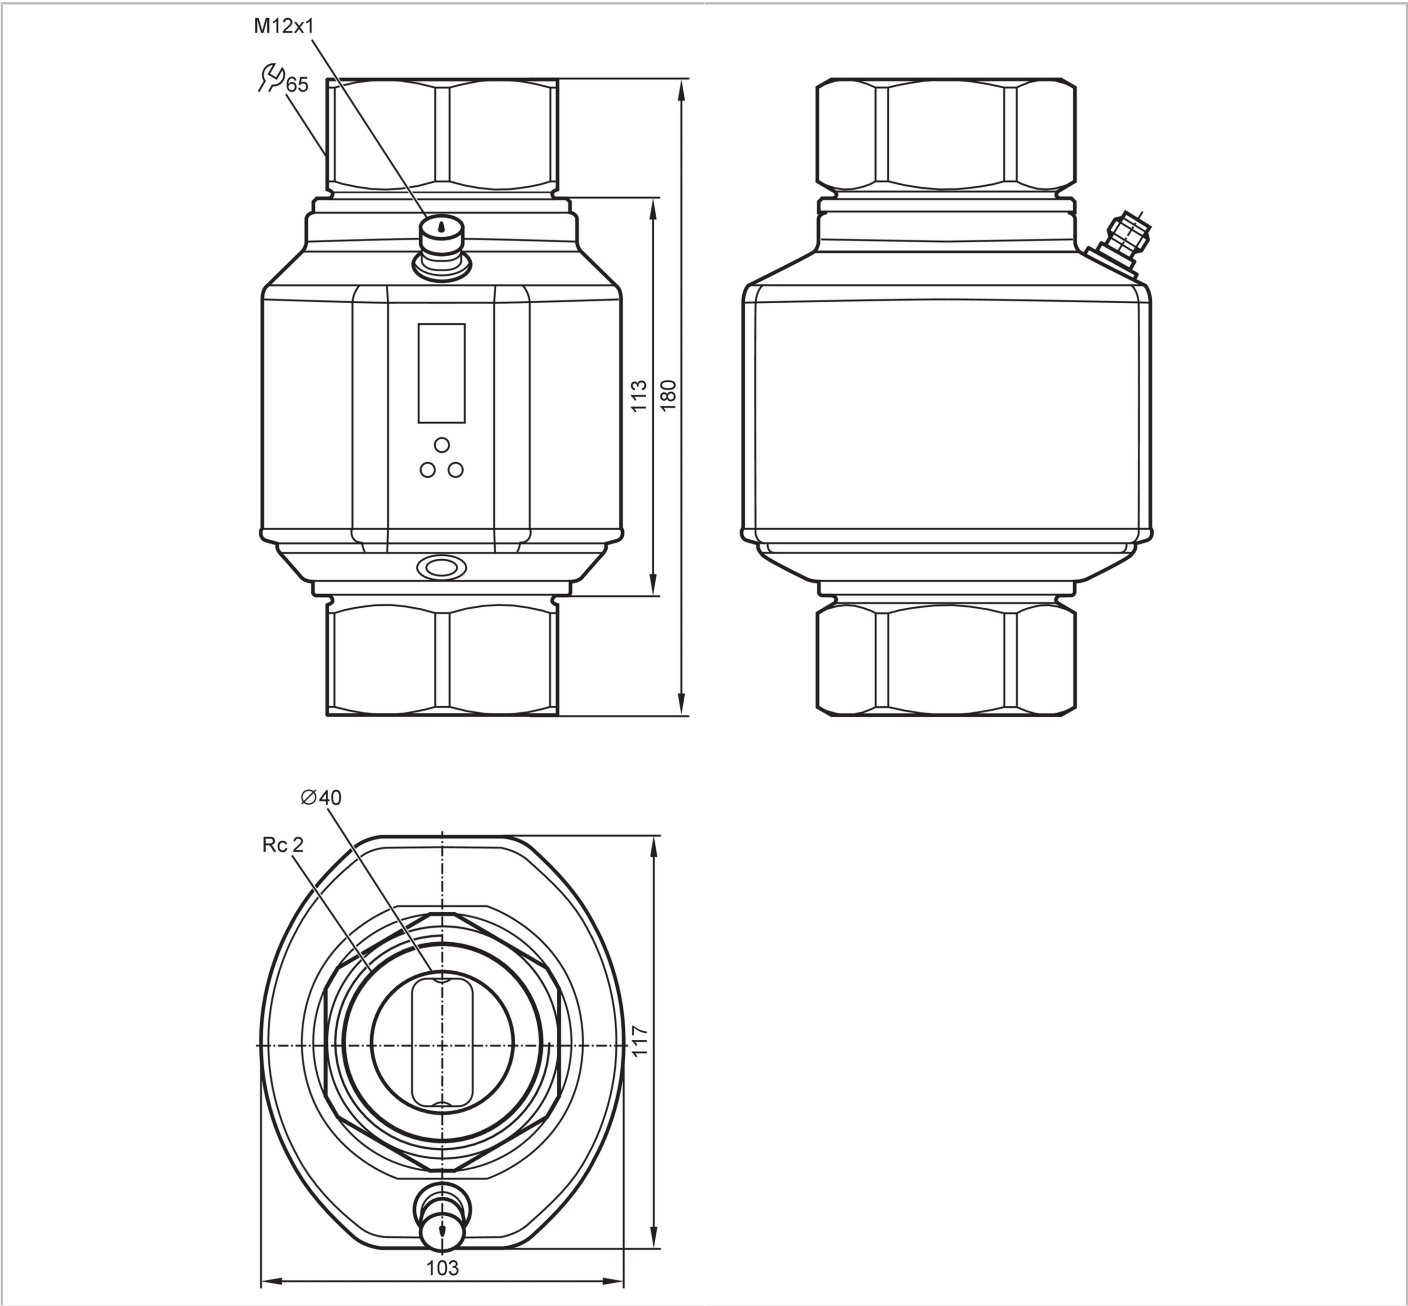

Product characteristics		
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Measuring range	5...600 l/min	0.3...36 m³/h
Process connection	threaded connection Rc 2 Internal thread DN50	
Application		
Special feature	gold-plated contacts	
Application	Totalizer function; empty pipe detection; for industrial applications	
Media	Conductive liquids; water; water-based media	
Note on media	conductivity: ≥ 20 µS/cm	
	viscosity: < 70 mm²/s (40 °C)	

SM2400



Magnetic-inductive flow meter

SMK21XGXFRKG/US-100

Medium temperature	[°C]	-10...90
Pressure rating	16 bar	1.6 MPa
MAWP (for applications according to CRN)	8.9 bar	0.89 MPa

Electrical data		
Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 150
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	5
Measuring principle		magnetic-inductive

Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1

Inputs		
Inputs		counter reset

Outputs		
Total number of outputs		2
Output signal		switching signal; analog signal; pulse signal; frequency signal; IO-Link; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		2
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	250; (per output)
Number of analog outputs		1
Analog current output	[mA]	4...20; (scalable)
Max. load	[Ω]	500
Analog voltage output	[V]	0...10; (scalable)
Min. load resistance	[Ω]	2000
Pulse output		flow rate meter
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Frequency of the output	[Hz]	0.1...10000

Measuring/setting range		
Measuring range	5...600 l/min	0.3...36 m³/h
Display range	-720...720 l/min	-43.2...43.2 m³/h
Resolution	0.5 l/min	0.02 m³/h
Set point SP	8...600 l/min	0.5...36 m³/h
Reset point rP	5...597 l/min	0.3...35.8 m³/h
Analog start point ASP	0...480 l/min	0...28.8 m³/h
Analog end point AEP	120...600 l/min	7.2...36 m³/h
Low flow cut-off LFC	< 15 l/min	< 0.9 m³/h
In steps of	0.5 l/min	0.02 m³/h



Magnetic-inductive flow meter

SMK21XGXFRKG/US-100

Measuring dynamics	1:120	
Volumetric flow quantity monitoring		
Pulse value	0.0001...600 x 10³ m³	
In steps of	0.0001 m³	
Pulse length [s]	0,008...2	
Temperature monitoring		
Measuring range [°C]	-20...80	
Display range [°C]	-40...100	
Resolution [°C]	0.2	
Set point SP [°C]	-19.2...80	
Reset point rP [°C]	-19.6...79.6	
Analog start point [°C]	-20...60	
Analog end point [°C]	0...80	
In steps of [°C]	0.2	
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	± (0,8 % MW + 0,5 % MEW)	
Repeatability	± 0,2% MEW	
Temperature monitoring		
Temperature drift	± 0,0333 °C / K	
Accuracy [K]	± 1 (bei 25 °C, Q > 15 l/min)	
Reaction times		
Flow monitoring		
Response time [s]	0.35; (dAP = 0)	
Delay time programmable dS, dr [s]	0...50	
Damping process value dAP [s]	0...5	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 3 (Q > 15 l/min)	
Software / programming		
Parameter setting options	Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / closed; switching logic; current/voltage/frequency/pulse output; Start-up delay; display can be deactivated; Display unit; empty pipe detection	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
SIO mode	yes	
Required master port class	A	

SM2400



Magnetic-inductive flow meter

SMK21XGXFRKG/US-100

Process data analog	3	
Process data binary	2	
Min. process cycle time [ms]	5	
Supported DeviceIDs	Type of operation	DeviceID
	default	389

Operating conditions		
Ambient temperature [°C]		-10...60
Storage temperature [°C]		-25...80
Protection		IP 65; IP 67

Tests / approvals		
EMC	DIN EN 60947-5-9	
CPA approval	model number	004MI
	accuracy class	-
	maximum allowable error	± 1,5 % FS
	Q (min)	0,3 m³/h
	Q (t)	-
	Q (max)	36 m³/h
	Medium temperature	-10...70°C
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF [years]		85
UL approval	UL approval number	I008
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]		2740
Housing		rectangular
Inlet pipe length		3 x DN
Outlet pipe length		1 x DN
Dimensions [mm]		180 x 103 x 117
Material	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); PEI; FKM; PBT-GF20; TPE-U	
Materials (wetted parts)	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); PEEK; FKM	
Process connection	threaded connection Rc 2 Internal thread DN50	

Displays / operating elements		
Display	Display unit	6 x LED, green (l/min, m³/h, l, m³, 10³, °C)
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, 4-digit
	Programming	alphanumeric display, 4-digit

Accessories		
Items supplied		Label

Remarks		
Remarks	MW = Measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	

SM2400



Magnetic-inductive flow meter


SMK21XGXFRKG/US-100

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

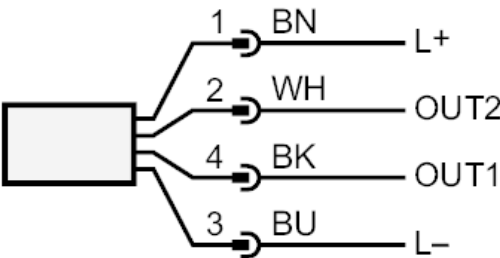

OUT1:	Colors to DIN EN 60947-5-2 Switching output empty pipe detection Switching output Volumetric flow quantity monitoring Frequency output Volumetric flow quantity monitoring Pulse output quantity meter signal output Preset counter IO-Link
OUT2:	Switching output empty pipe detection Switching output Volumetric flow quantity monitoring Switching output Temperature monitoring analog output Volumetric flow quantity monitoring analog output Temperature monitoring Input counter reset Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white

SM2400



Magnetic-inductive flow meter

SMK21XGXFRKG/US-100

Diagrams and graphs

Pressure loss

