

SU8000


Ultrasonic flow meter

SUR11HGBFRKG/W/US-100-IPF



Article to be discontinued
Discontinuation date: 12/31/2025

Alternative articles: SU8030
When selecting an alternative article and accessories please note that technical data may differ!

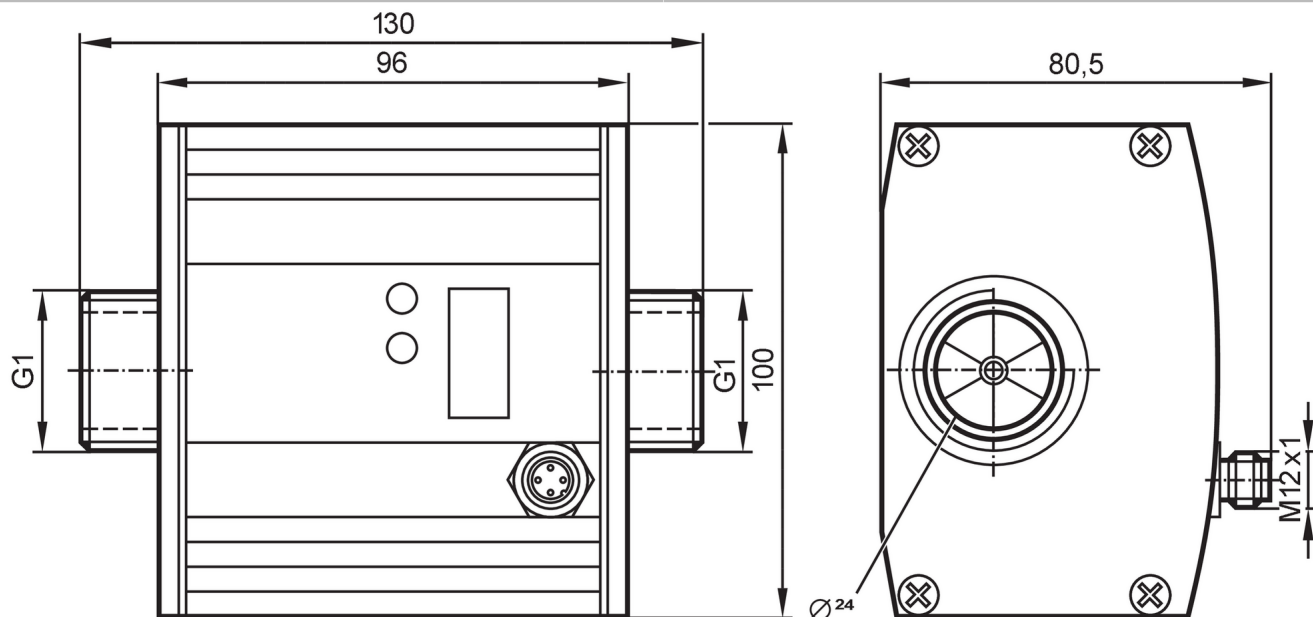

installation length with pipe adapter E40152 / E40155: 205 mm
installation length with pipe adapter E40153 / E40156: 215 mm



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Measuring range	0...100 l/min	0...6 m³/h
Process connection	threaded connection G 1 external thread flat seal	

Application

Special feature	gold-plated contacts	
Application	Totalizer function; for industrial applications	
Installation	connection to pipe by means of an adapter	
Media	water; glycol solutions; Coolants; oils	
Note on media	low-viscosity oils with viscosity: 7...40 mm²/s (40 °C)	
	high-viscosity oils with viscosity: 30...68 mm²/s (40 °C)	
Medium temperature	[°C]	-10...80
Pressure rating	16 bar	1.6 MPa

Electrical data

Operating voltage	[V]	19...30 DC; (to SELV/PELV)
Current consumption	[mA]	100
Min. insulation resistance	[MΩ]	100; (500 V DC)
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	10



Ultrasonic flow meter

SUR11HGBFRKG/W/US-100-IPF

Measuring principle	ultrasonic	
Inputs / outputs		
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Inputs		
Inputs	counter reset	
Outputs		
Total number of outputs	2	
Output signal	switching signal; analog signal; pulse signal; (configurable)	
Electrical design	PNP/NPN	
Number of digital outputs	2	
Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]	2	
Permanent current rating of switching output DC [mA]	250; (per output)	
Number of analog outputs	1	
Analog current output [mA]	4...20; (scalable)	
Max. load [Ω]	500	
Analog voltage output [V]	0...10; (scalable)	
Min. load resistance [Ω]	2000	
Pulse output	flow rate meter	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Measuring/setting range		
Measuring range	0...100 l/min	0...6 m³/h
Display range	0...120 l/min	0...7.2 m³/h
Resolution	0.1 l/min	0.005 m³/h
Set point SP	0.2...100 l/min	0.01...6 m³/h
Reset point rP	0...99.8 l/min	0...5.99 m³/h
Analog start point ASP	0...80 l/min	0...4.8 m³/h
Analog end point AEP	20...100 l/min	1.2...6 m³/h
Max. flow rate	110 l/min	6.6 m³/h
In steps of	0.1 l/min	0.005 m³/h
Volumetric flow quantity monitoring		
Pulse value	0.1 l...1 000 000 m³	
Pulse length [s]	0,025...2	
Temperature monitoring		
Measuring range [°C]	-10...80	
Resolution [°C]	0.2	
Set point SP [°C]	-9.8...80	
Reset point rP [°C]	-10...79.8	
Analog start point [°C]	-10...62	
Analog end point [°C]	8...80	

SU8000



Ultrasonic flow meter

SUR11HGBFRKG/W/US-100-IPF

In steps of	[°C]	0.2
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)		water: $< \pm (3 \% \text{ MW} + 0,2 \% \text{ MEW})$; glycol (35 %), oil (viscosity 68 mm ² /s at 40 °C): $< \pm (5 \% \text{ MW} + 0,5 \% \text{ MEW})$
Repeatability		0,2 l/min; 12 l/h; 0,012 m ³ /h
Temperature monitoring		
Accuracy	[K]	$\pm 3 (Q > 1 \text{ l/min})$
Reaction times		
Flow monitoring		
Response time	[s]	0.25; (dAP = 0)
Delay time programmable dS, dr	[s]	0...50
Damping process value dAP	[s]	0...1
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 70 (Q > 5 l/min); (water)
Software / programming		
Parameter setting options		Flow monitoring; quantity meter; Preset counter; Temperature monitoring
Operating conditions		
Ambient temperature	[°C]	-10...60
Storage temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5 kV
	EN 61000-4-6 HF conducted	10 V
	model number	001US
CPA approval	accuracy class	3
	maximum allowable error	-
	Q (min)	0,3 m ³ /h
	Q (t)	0,54 m ³ /h
	Q (max)	6 m ³ /h
Shock resistance	DIN IEC 68-2-27	20 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	5 g (10...2000 Hz)
MTTF	[years]	185
Pressure equipment directive		sound engineering practice; can be used for group 2 fluids; group 1 fluids on request
Mechanical data		
Weight	[g]	1713.5
Housing		rectangular
Dimensions	[mm]	130 x 100 x 80.5
Material		housing: Aluminum Alloy anodized AlMgSi0,5; sealing: FKM; PA 6.6; cover film: PA
Materials (wetted parts)		Pipe section: stainless steel (1.4404 / 316L); Process connection sealing: NBR fiber-reinforced Gasket; FKM; PES

SU8000



Ultrasonic flow meter

SUR11HGBFRKG/W/US-100-IPF

Process connection	threaded connection G 1 external thread flat seal
--------------------	---

Displays / operating elements

Display	Display unit	6 x LED, green (l/min, m³/h, l, m³, 10³, °C)
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, 4-digit
	Programming	alphanumeric display, 4-digit

Accessories

Items supplied	sealings: 2, Centellen
Accessories (optional)	adapter for pipe: 1 x R 1/2, stainless steel, E40179
	adapter for pipe: 1 x R 3/4, stainless steel, E40180
	adapter for pipe: 1 x R 1/2, brass, E40152
	adapter for pipe: 1 x R 3/4, brass, E40153

Remarks


Remarks	MW = Measured value
	MEW = Final value of the measuring range
	sealing: only with supplied Centellen seals
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated; Moulded body: brass, Optalloy-plated



Connection

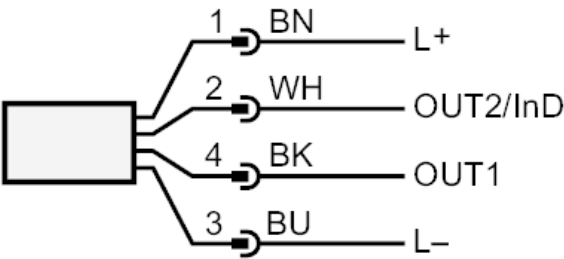

OUT1:	Switching output Volumetric flow quantity monitoring Pulse output quantity meter signal output Preset counter
OUT2/InD:	Switching output Volumetric flow quantity monitoring / Temperature monitoring analog output Volumetric flow quantity monitoring / Temperature monitoring Input counter reset

SU8000


Ultrasonic flow meter

SUR11HGBFRKG/W/US-100-IPF



Diagrams and graphs

Pressure loss

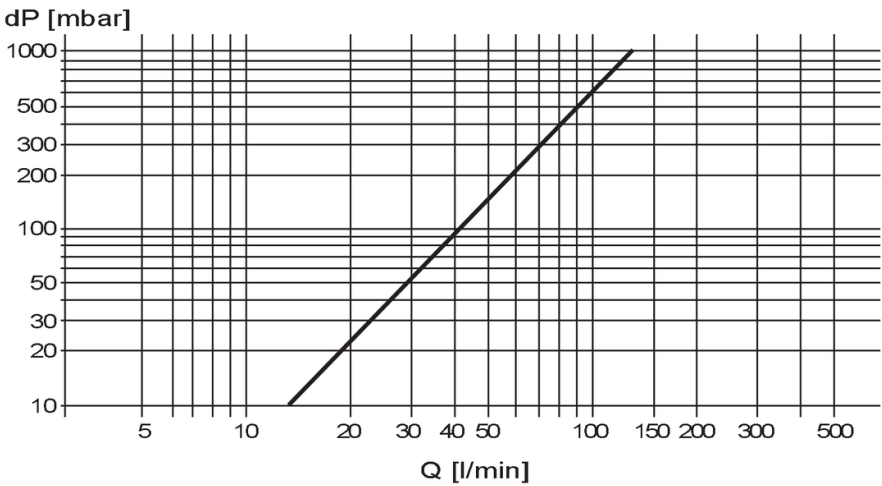

dP Pressure loss
Q volumetric flow quantity