


SUH430

Ultrasonic flow meter

SUG50IGBFRKG/US

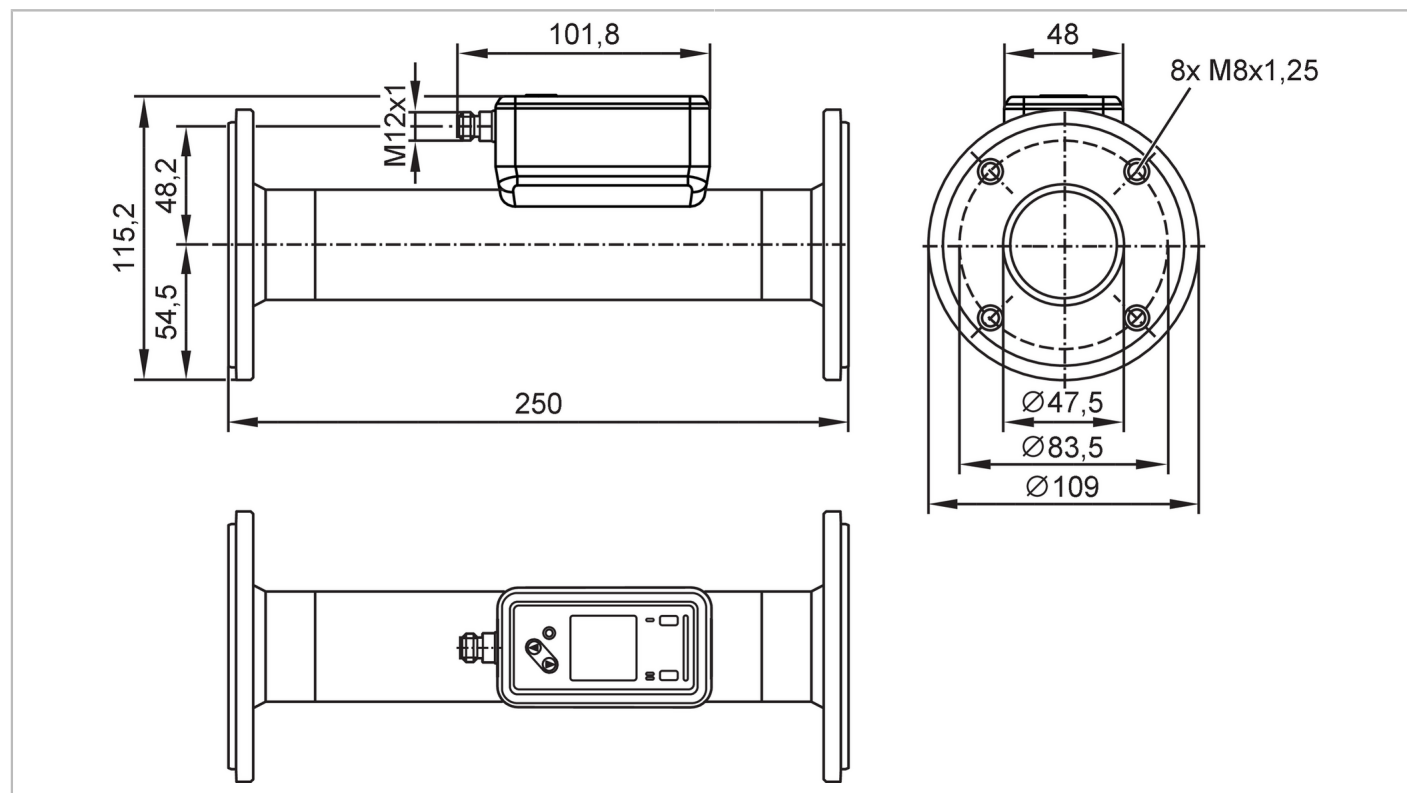

EC 1935/2004

FCM



Product characteristics

Measuring range	5...1000 l/min	300...60000 l/h	0.058...11.666 m/s	0.3...60 m³/h
Nominal diameter	DN50 (2")			
Process connection	ifm-specific device flange			

Application

Special feature	gold-plated contacts	
Media	ultra-pure water; water; water-based media; edible oils	
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value	
	edible oils: palm oil, soy oil, rapeseed oil, sunflower oil, peanut oil, olive oil and others	
Medium temperature [°C]	-20...100	
Min. burst pressure	75 bar	7.5 MPa
Pressure rating	25 bar	2.5 MPa
Vacuum resistance [mbar]	-1000	

Electrical data

Operating voltage [V]	18...32 DC; (to SELV/PELV)			
Current consumption [mA]	< 75			
Protection class	III			
Reverse polarity protection	yes			
Power-on delay time [s]	5			
Measuring principle	ultrasonic			

SUH430

Ultrasonic flow meter

SUG50IGBFRKG/US



Inputs / outputs				
Total number of inputs and outputs	2			
Inputs				
Inputs	OUT2	counter reset		
Outputs				
Total number of outputs	2			
Output signal	OUT1	switching signal; pulse signal; diagnostic signal; totalizer switching signal; frequency signal; IO-Link		
	OUT2	switching signal; pulse signal; diagnostic signal; totalizer switching signal; analog signal		
Electrical design	PNP/NPN			
Min. load resistance [Ω]	2000			
Pulse output	flow rate meter			
Short-circuit protection	yes			
Type of short-circuit protection	yes (non-latching)			
Overload protection	yes			
Analog				
Number of analog outputs	1			
Analog current output [mA]	4...20			
Max. load [Ω]	500			
Digital				
Number of digital outputs	2			
Output function	normally open / closed; (configurable)			
Max. voltage drop switching output DC [V]	2			
Permanent current rating of switching output DC [mA]	100			
Switching frequency DC [Hz]	0...10000			
Measuring/setting range				
Measuring range	5...1000 l/min	300...60000 l/h	0.058...11.666 m/s	0.3...60 m³/h
Display range	-1200...1200 l/min	-72000...72000 l/h	-13.999...13.999 m/s	-72...72 m³/h
Resolution	0.1 l/min	1 l/h	0.001 m/s	0.002 m³/h
Set point SP	10.5...1000 l/min	630...60000 l/h	0.122...11.666 m/s	0.63...60 m³/h
Reset point rP	5.3...994.8 l/min	318...59688 l/h	0.062...11.605 m/s	0.318...59.688 m³/h
Analog start point ASP	-1000...800 l/min	-60000...48000 l/h	-11.666...9.333 m/s	-60...48 m³/h
Analog end point AEP	-800...1000 l/min	-48000...60000 l/h	-9.333...11.666 m/s	-48...60 m³/h
Low flow cut-off LFC	5...50 l/min	300...3000 l/h	0.058...0.583 m/s	0.3...3 m³/h
Frequency end point, FEP	200.6...1000 l/min	12037...60000 l/h	2.34...11.666 m/s	12.037...60 m³/h
Frequency at the end point FRP [Hz]	1...10000			
Volumetric flow quantity monitoring				
Pulse length [s]	0.002...2			
Pulse value	0.1...99990000 l			



Ultrasonic flow meter

SUG50IGBFRKG/US

Temperature monitoring		
Measuring range	[°C]	-20...100
Display range	[°C]	-44...124
Resolution	[°C]	0.1
Set point SP	[°C]	-19.6...100
Reset point rP	[°C]	-20...99.6
Analog start point	[°C]	-20...76
Analog end point	[°C]	4...100
Frequency start point, FSP	[°C]	-20...76
Frequency end point, FEP	[°C]	4...100
Frequency at the end point FRP	[Hz]	1...10000
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)	edible oils	± (5,0 % MW + 1,0 % MEW)
	water	± (1,0 % MW + 0,5 % MEW)
Repeatability		± 0,2 % MEW
Temperature monitoring		
Accuracy	[K]	± 2,5 (Q > 5 % MEW)
Temperature coefficient [% of the span / 10 K]		0,2
Reaction times		
Flow monitoring		
Response time	[s]	< 0.25; (dAP = 0, T09)
Damping process value dAP	[s]	0...5
Temperature monitoring		
Dynamic response T05 / T09	[s]	5,7 / 86
Software / programming		
Diagnostic functions		direction of flow detection; signal quality
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
Required master port class		A
Process data analog		3
Process data binary		2
Min. process cycle time	[ms]	9.6

SUH430



Ultrasonic flow meter

SUG50IGBFRKG/US

IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
Supported DeviceIDs	Output 2	1
	Type of operation	DeviceID
	default	1989

Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...80
Protection		IP 69; (DIN EN 60529)

Tests / approvals		
EMC	DIN 61326-1:2021	
Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
UL approval	UL approval number	I033
	File number UL	E174189
Pressure equipment directive	can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	1863.25
Housing		rectangular
Inlet pipe length		5 x DN
Outlet pipe length		1 x DN
Dimensions	[mm]	250 x 109 x 115.2
Material		housing: stainless steel (1.4404 / 316L); Display: PFA; sealing Display: FKM; connector: PBT
Materials (wetted parts)		Pipe section: stainless steel (1.4435 / 316L); Process connection: stainless steel (1.4404 / 316L)
Nominal diameter		DN50 (2")
Process connection		ifm-specific device flange
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.4 µm; Rz = 4 µm

Displays / operating elements		
Display		Color display 1,44", 128 x 128 pixels
	Switching function	2 x LED, yellow
	diagnosis	1 x LED, three-color

Remarks		
Remarks	MW = Measured value	
	MEW = Final value of the measuring range	
	pulse and totalizer signal are only available for one of the two outputs	
	the accuracy indications are adhered to over the entire application area	
	the specified Ra surface characteristics of the wetted surfaces do not apply to the weld seam.	
Pack quantity	1 pcs.	

SUH430



Ultrasonic flow meter


SUG50IGBFRKG/US

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

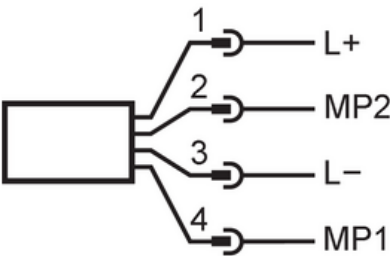


1 (L+)	L+	
2 (OUT2)	MP2	DO2, AO, DI
3 (L-)	L-	
4 (OUT1)	MP1	DO1, FO, IO-Link

AO: analog output; DI: digital input; DO: digital output; FO: Frequency output; MP: multi-function connection

Diagrams and graphs

Note on pressure loss

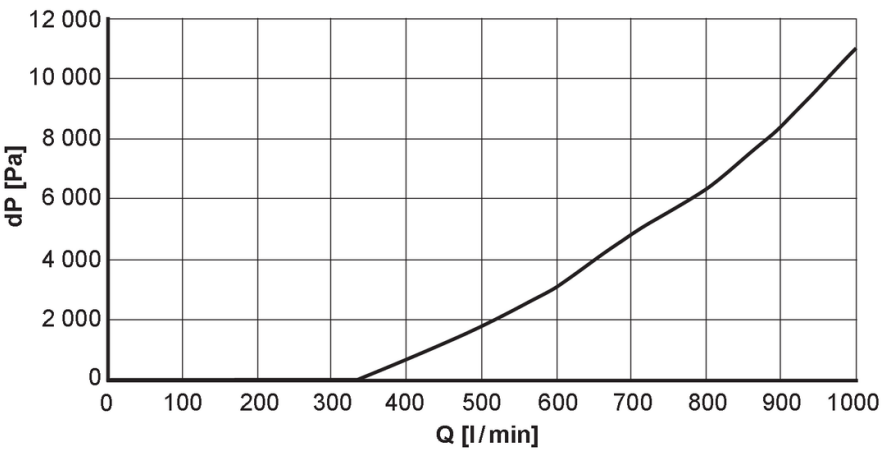

SUH430

Ultrasonic flow meter

SUG50IGBFRKG/US



derating ambient temperature

